


# T0-33

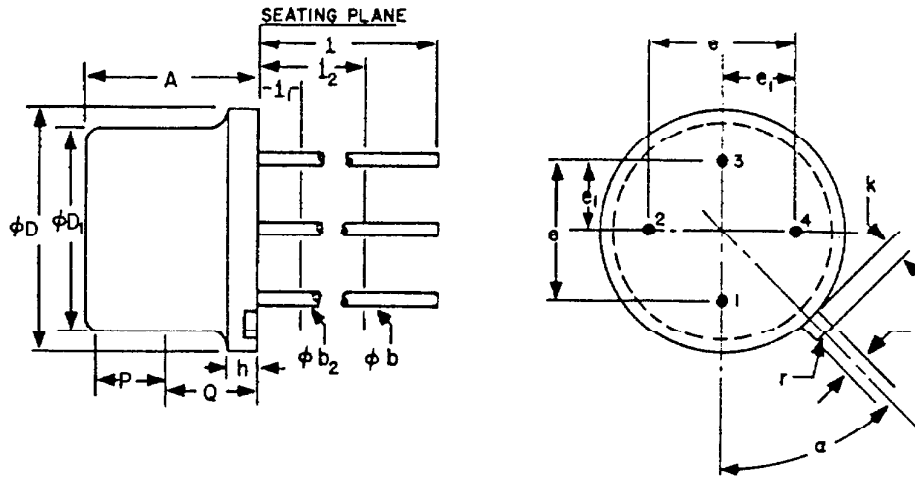

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN.	MAX.	MIN.	MAX.	
A	.240	.260	6.10	6.60	
$\phi b$	.016	.021	.406	.533	2
$\phi b_2$	.016	.019	.406	.483	2
$\phi D$	.335	.370	8.51	9.40	
$\phi D_1$	.305	.335	7.75	8.51	
e	.200 T.P.		5.08 T.P.		4, 5
e <sub>1</sub>	.100 T.P.		2.54 T.P.		4, 5
h	.009	.125	.229	3.18	
j	.028	.034	.711	.864	5
k	.029	.045	.737	1.14	3, 5
l	1.500		38.10		2
l <sub>1</sub>		.050		1.27	2
l <sub>2</sub>	.250		6.35		2
P	.100		2.54		1
Q					6
r		.007		.178	
a	45° T.P.				4, 5, 7

**NOTES:**

1. THIS DEVICE IS CONTROLLED FOR AUTOMATIC HANDLING. THE VARIATION IN ACTUAL DIAMETER WITHIN THE ZONE SHALL NOT EXCEED .010" (.254 MM).
2. (FOUR LEADS)  $\phi b_2$  APPLIES BETWEEN l<sub>1</sub> AND l<sub>2</sub>.  $\phi b$  APPLIES BETWEEN l<sub>2</sub> AND 1.5" (38.10 MM) FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN l<sub>1</sub> AND BEYOND 1.5" (38.10 MM) FROM SEATING PLANE.
3. MEASURED FROM MAXIMUM DIAMETER OF THE ACTUAL DEVICE.
4. LEADS HAVING MAXIMUM DIAMETER .019" (.483 MM) MEASURED IN GAGING PLANE .054" (1.37 MM) + .001" (.025 MM) - .000" (.000 MM) BELOW THE SEATING PLANE OF THE DEVICE SHALL BE WITHIN .007" (.178 MM) OF THEIR TRUE POSITIONS RELATIVE TO A MAXIMUM-WIDTH TAB.
5. THE DEVICE MAY BE MEASURED BY DIRECT METHODS OR BY THE GAGE AND GAGING PROCEDURE DESCRIBED ON GAGE DRAWING GS-1.
6. DETAILS OF OUTLINE IN THIS ZONE OPTIONAL.
7. TAB CENTERLINE.

4.6.15